



0.1uH Iron Powder Toroidal Core (T-30-12) Leaded Inductor with Wire Shortened (Linear-Scale)

Sampling at the suggested Operating Frequency (20MHz - 200MHz)

Real Impedance vs Frequency

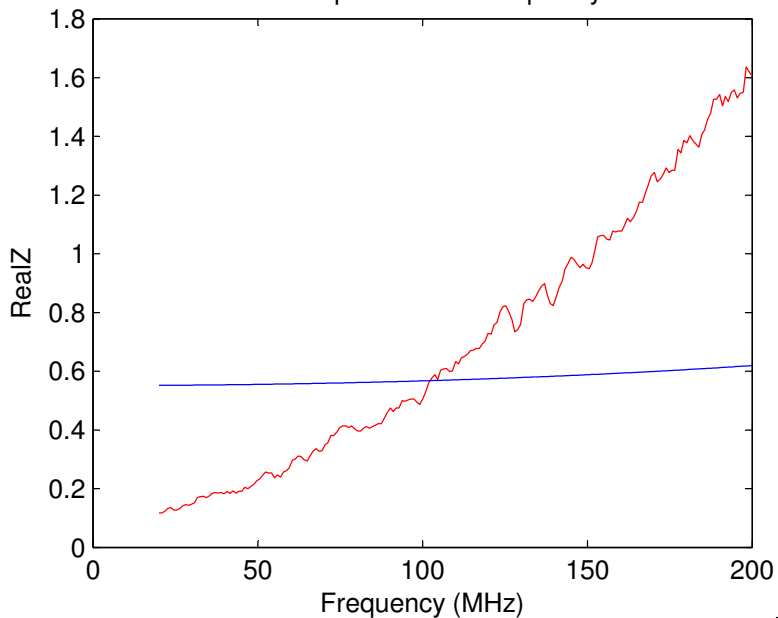


Magnitude vs Frequency

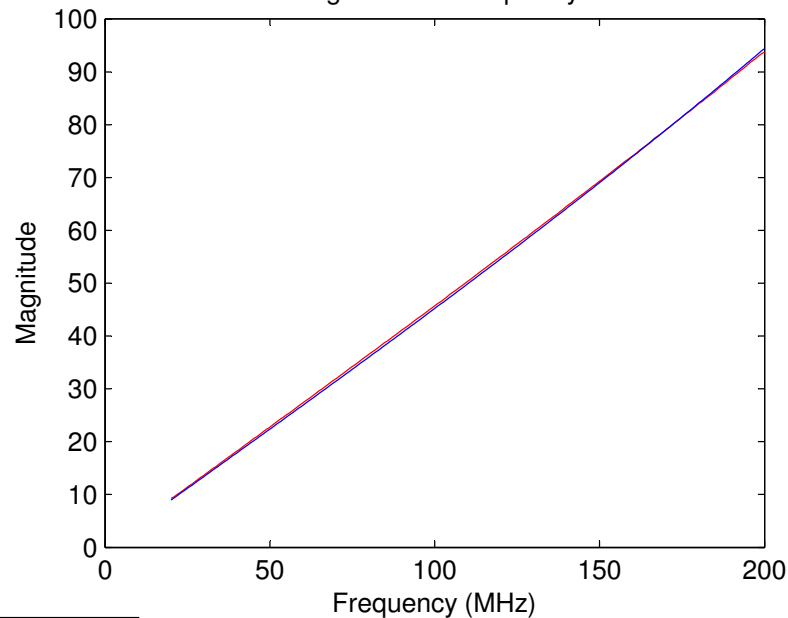

— Measurement  
— Model

Imaginary Impedance vs Frequency

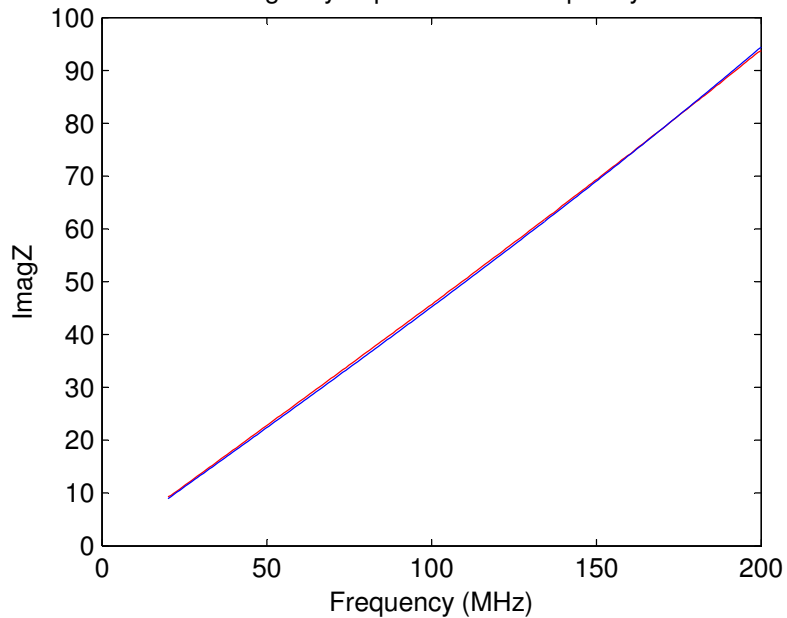

Phase vs Frequency

